

PHYSICAL SPECIFICATION

Nominal Voltage		12V
Nominal Capacity (20HR)		26AH
Dimensions	Length	166 ± 1mm (6.54 inches)
	Width	176 ± 1mm (6.93 inches)
	Container Height	128 ± 2mm (5.04 inches)
	Total Height	128 ± 2mm (5.04 inches)
Weight		Approx 7.6 kg (16.72bs)
Standard Terminal		B3- Bolt and Nuts Terminal Bolt Type: M5


PRB1226T(12V26AH)

Major Application(s):


Power System, U.P.S




Dimensions (mm)

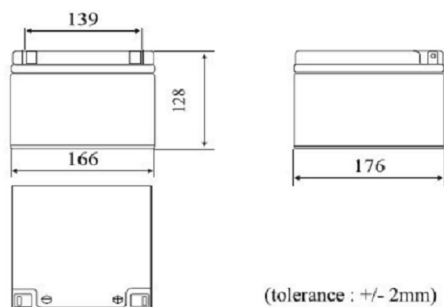

Standard Terminal
B1 (copper) Bolt Type: M5

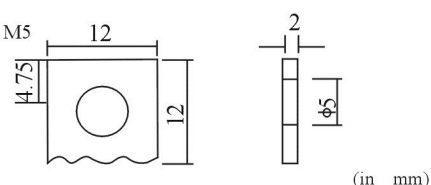

Optional Terminal
B2 (Lead) Bolt Type: M5

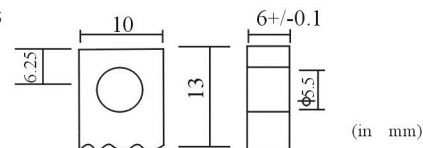

ELECTRICAL SPECIFICATION

Capacity	20 hour rate (1.25A)	25.0AH	It is recommended to use constant-voltage charge and recharge immediately after use		
	10 hour rate (2.4A)	24.0AH	Constant-Voltage Charge	Cycle	Initial Charging Current less than 6.0A
	5 hour rate (4.1A)	20.5AH			Voltage 14.40V~15.00V at 25°C (77°F)
	1 hour rate (13.2A)	13.2AH		Temperature Coefficient -30mV/°C	
Capacity affected by Temperature	40°C (104 °F)	105%			Standby
	25°C (77 °F)	100%			
	0°C (32 °F)	85%			
Internal Resistance	Fully charged battery(25°C,77°F) 15m Ω				

